



REVISIONS

NO.	DATE	DESCRIPTION	BY	CKD
1	09/21/17	ADDED 26" LENGTH	MBG	
2	02/15/22	REMOVED 13", 18", 19.25" & 26" LENGHT OPTION	BHB	

CATALOG NUMBER	LENGTHS (IN)		
	L1	L2	D
POLYURETHANE COATED SERIES			
GCS8-24	24	12.72	.750
GCS8-36	36	24.72	.750
GCS8-48	48	36.72	.750
GCS8-60	60	48.72	.750

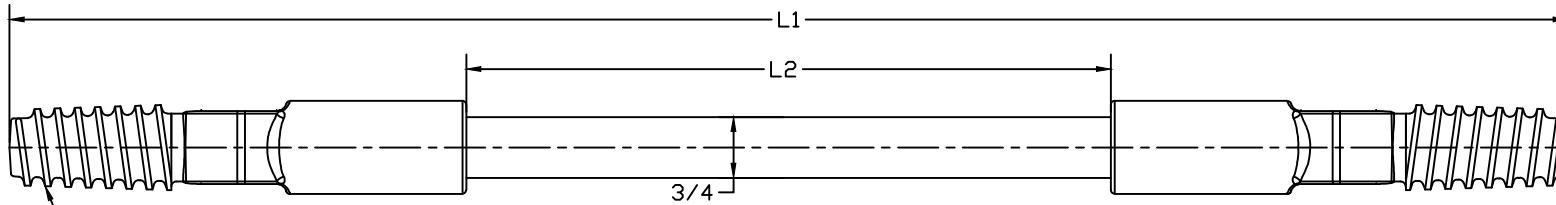

1" DIAMETER PVC COATED THREADS

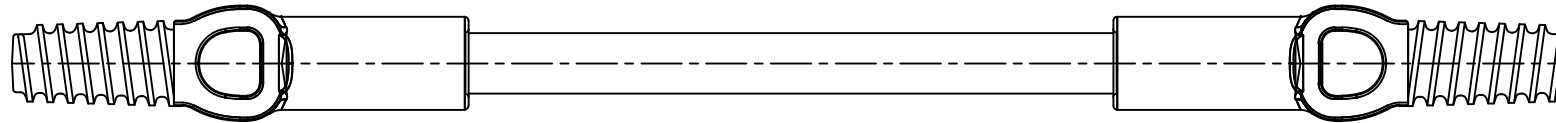

NOTES:

- 1.0 MATERIAL
 - 1.1 END FITTING - DUCTILE IRON 654512
 - 1.2 ROD - FIBERGLASS
- 2.0 FINISH
 - 2.1 END FITTING - HOT DIP GALVANIZED PER ASTM A-153
 - 2.2 ROD - MPS GRAY ULTRAVIOLET PROTECTIVE COATING
- 3.0 OPTIONS
 - 3.1 FOR OTHER LENGTHS, CONTACT FACTORY
- 4.0 DIMENSIONS IN INCHES

MacLean Power Systems
BIRMINGHAM, ALABAMA

GCS8-"L1" SERIES
CONDUCTOR SPACER

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance and operation of products supplied by Maclean Power Systems.

DATE: 7-05-12	SCALE: NONE	NO. CEB-4090	R/2	SH. 1
DWN. BY: MYL	CD. BY:	APR. BY:		OF 1