

MPS Catalog Number:

**S2 40 80 090 VA SS 053**

Date:

05/07/2021

**End Fittings**

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-8/11)

**Material**

Corona Ring (Tower):

None

Corona Ring (Line):

8" Corona Ring

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

53 Standard

Rod Diameter:

24 mm

Weight Estimate:

31.5 lbs

14 kg

**Dimensional Values**

Section Length (L):

104.6 in 2,657 mm

Rubber Length (X):

90 in 2,286 mm

Standard Shed Height (P):

2.1 in 54 mm

Shed Spacing (S):

1.7 in 43 mm

Dry Arc Distance:

90.1 in 2,289 mm

Leakage Distance:

294.4 in 7,478 mm

**Electricals Values**

60 Hz dry Flashover (Min. Withstand):

872 kV 783 kV

60 Hz Wet Flashover (Min. Withstand):

777 kV 640 kV

CIFO Positive (Min. Withstand):

1441 kV 1294 kV

CIFO Negative (Min. Withstand):

1503 kV 1356 kV


**Mechanical Values**

Specified Mech. Load (SML):

50,000 lbs 222.4 kN

Routine Test Load (RTL):

25,000 lbs 111.2 kN

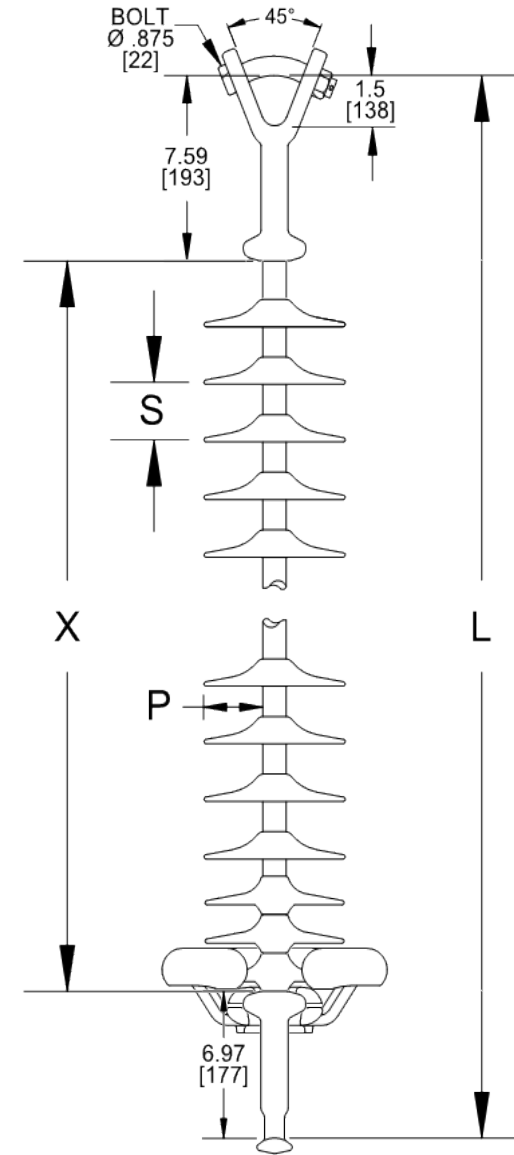

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., 7801 Park Place Rd., York, South Carolina 29745, USA."

Dimension: inches [millimeters]

NOTE: Drawing not actual depiction of insulator appearance.

Silicone rubber sheath and sheds complies with applicable ANSI and IEC standards.

Notes:

Prepared By: Laurel Wallace