

MPS Catalog Number:

S5 40 80 078 VA SS 032

Date:

05/18/2021

End Fittings

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-5)

Material

Corona Ring (Tower):

None

Corona Ring (Line):

8" Corona Ring

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

32 Standard

Rod Diameter:

16 mm

Weight Estimate:

17.7 lbs

8 kg

Dimensional Values

Section Length (L):

89.6 in 2,276 mm

Rubber Length (X):

78 in 1,981 mm

Standard Shed Height (P):

2.1 in 54 mm

Shed Spacing (S):

2.54 in 65 mm

Dry Arc Distance:

78 in 1,981 mm

Leakage Distance:

200.9 in 5,103 mm

Electrical Values

60 Hz dry Flashover (Min. Withstand):

757 kV 686 kV

60 Hz Wet Flashover (Min. Withstand):

651 kV 566 kV

CIFO Positive (Min. Withstand):

1262 kV 1123 kV

CIFO Negative (Min. Withstand):

1322 kV 1182 kV


Mechanical Values

Specified Mech. Load (SML):

30,000 lbs 133.4 kN

Routine Test Load (RTL):

15,000 lbs 66.7 kN

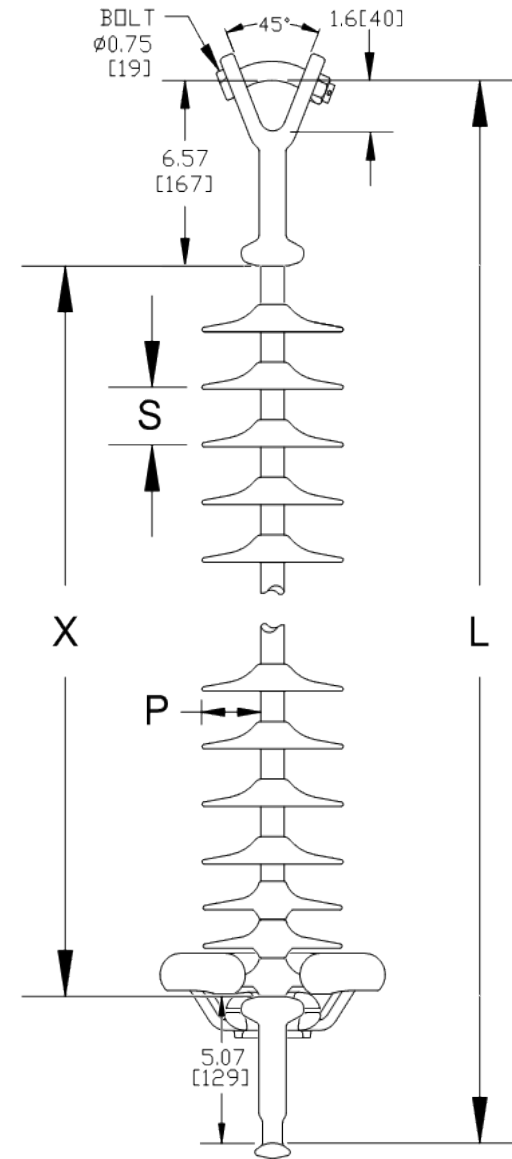

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., 7801 Park Place Rd., York, South Carolina 29745, USA."

Dimension: inches [millimeters]

NOTE: Drawing not actual depiction of insulator appearance.

Silicone rubber sheath and sheds complies with applicable ANSI and IEC standards.

Notes:

Prepared By: Laurel Wallace