

MPS Catalog Number:

**S5 40 80 096 VA SS 056**

Date:

05/18/2021

**End Fittings**

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-5)

**Material**

Corona Ring (Tower):

None

Corona Ring (Line):

8" Corona Ring

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

56 Standard

Rod Diameter:

16 mm

Weight Estimate:

24.6 lbs

11 kg

**Dimensional Values**

Section Length (L):

107.6 in 2,733 mm

Rubber Length (X):

96 in 2,438 mm

Standard Shed Height (P):

2.1 in 54 mm

Shed Spacing (S):

1.71 in 43 mm

Dry Arc Distance:

96 in 2,438 mm

Leakage Distance:

312 in 7,925 mm

**Electrical Values**

60 Hz dry Flashover (Min. Withstand):

929 kV 829 kV

60 Hz Wet Flashover (Min. Withstand):

818 kV 674 kV

CIFO Positive (Min. Withstand):

1527 kV 1377 kV

CIFO Negative (Min. Withstand):

1590 kV 1441 kV


**Mechanical Values**

Specified Mech. Load (SML):

30,000 lbs 133.4 kN

Routine Test Load (RTL):

15,000 lbs 66.7 kN

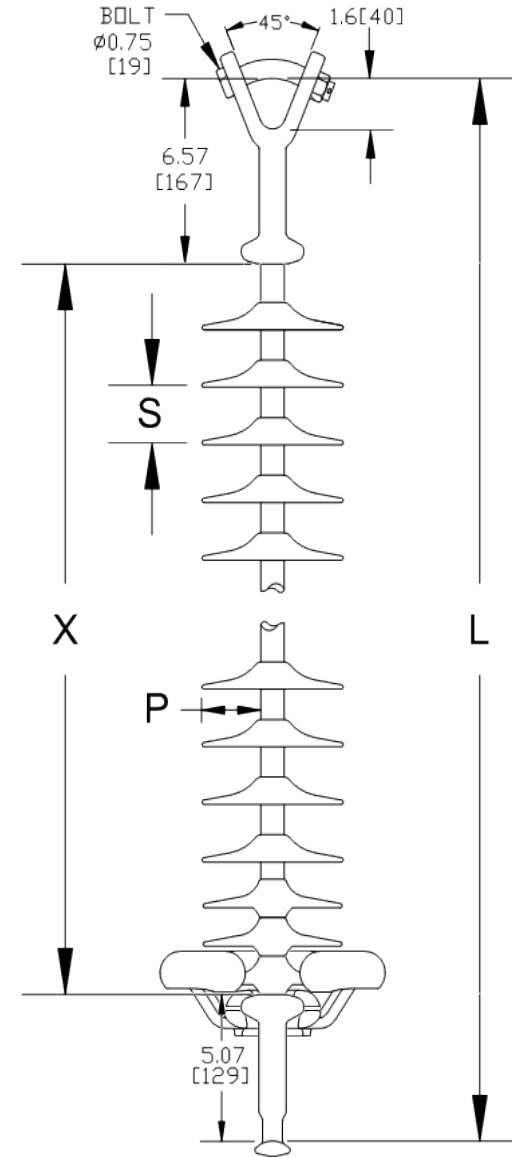

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., 7801 Park Place Rd., York, South Carolina 29745, USA."

Dimension: inches [millimeters]

NOTE: Drawing not actual depiction of insulator appearance.

Silicone rubber sheath and sheds complies with applicable ANSI and IEC standards.

Notes:

Prepared By: Laurel Wallace