




Max. Discharge Voltage Using
an 8/20 usec Current Wave
(kV)


Catalog No.	Voltage Rating MCOV (V)	Poles	Weight Oz. (Grams)	Energy Capability (Joules / Phase)	Response Time (nsec)	F.O.W. Protection Level (kV Crest)	1.5kA	5.0kA	10kA
Z2-175-0	175	2	15 [466]	300	<5	1.209	0.747	0.954	1.271

Stated F.O.W. and Discharge Voltage values are at a 1" lead length.

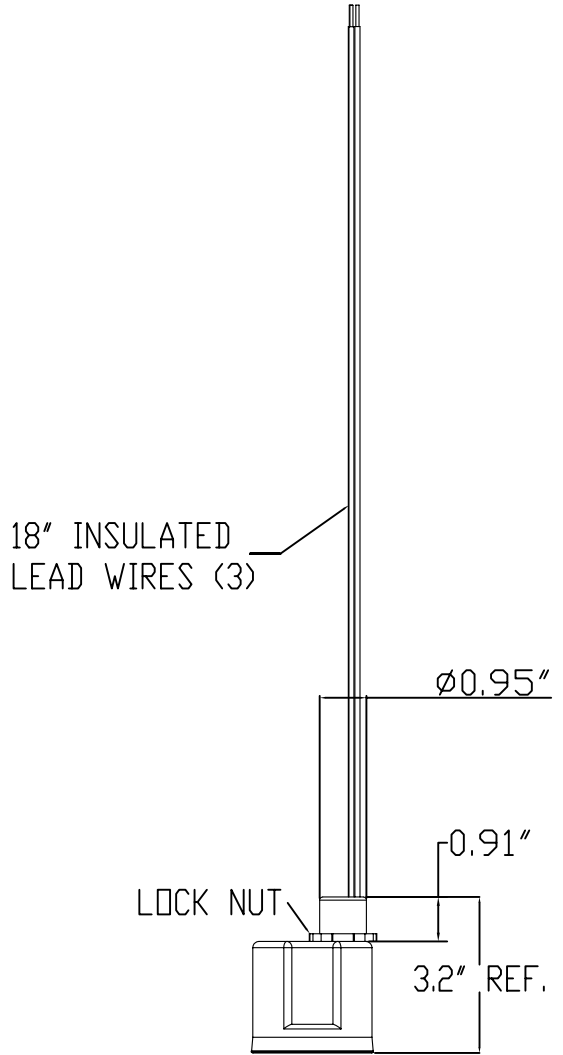

LABEL

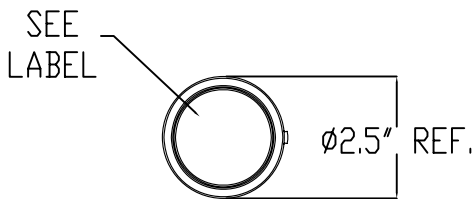

 MACLEAN POWER SYSTEMS www.maclepower.com	
ZSEC SECONDARY ARRESTER 175 V 2-POLE	
DATE 09/24/08	<h1>Z2-175-0</h1>
DRAWN MTV	
CHECKED	
DO NOT SCALE DRAWING	
SHEET 1 OF 1	

THIS DRAWING IS THE PROPERTY OF MACLEAN POWER SYSTEMS AND EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN IN WHICH MACLEAN POWER SYSTEMS RETAINS ALL PATENTS AND PROPRIETARY RIGHTS, INCLUDING EXCLUSIVE RIGHT OF USE, MANUFACTURE AND SALE. BY ACCEPTING THIS DRAWING, THE RECIPIENT AGREES NOT TO DISCLOSE, REPRODUCE OR USE ANY INFORMATION CONTAINED HEREIN WITHOUT THE PRIOR WRITTEN CONSENT OF MACLEAN POWER SYSTEMS.