



## Grounding Cluster Block

### Features

- For installation on a pole or structure. The 11.5" bar accepts up to four grounding clamps
- Block also has two threaded holes to accept 5/8 - 11 UNC ferrules
- Rating: 43kA ASTM

### Material

Bar: 3/4" tinned copper

Catalog Number	Mounting	Weight Ea (lbs)
HC-10111	Chain tightener	6.7



## Temporary Grounding Rod

### Features


- A time saving product for maintenance or testing where there is no permanent ground. It can also be used for applications where there is no system neutral
- T-Lug is provided for a maximum 2/0 ground cable
- If required, compression type threaded ferrules can also be used for ground cable connection

### Materials

Auger bit and handle: Bronze alloy  
Shaft: Copperweld

Catalog Number	Maximum Conductor Size	Overall Dimensions	Weight Ea (lbs)
133007	2/0 AWG class "K"	1/2" diameter x 6 feet	29.0

Grounding block

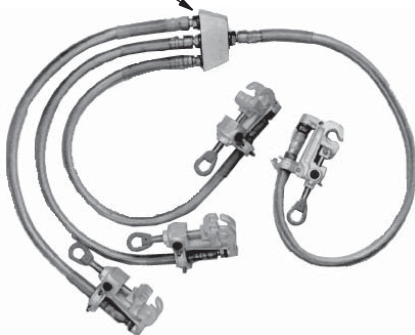


## Three Way Grounding Block

### Features

- Connection joint in a temporary grounding three phase assembly
- Tested up to 49kA (ASTM) and 35kA (IEC)

### Material

Aluminum 6061-T6

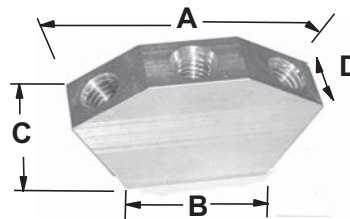

Catalog Number	Jumper Cable		Dimensions				Capacity 15 Cycles	Capacity 30 Cycles	Weight Ea (lbs)
	Min	Max	A	B	C	Thread			
HC-10093	2 AWG	4/0 AWG	3 3/4	2 3/8	2	1	35 kA (IEC) 49kA (ASTM)	30kA (ASTM)	0.3