




Clamps



PA296X



PA292X

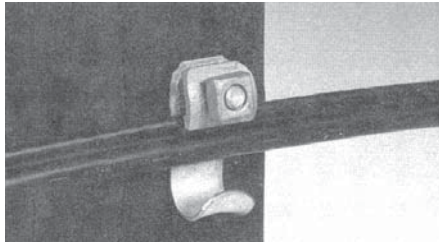

Aerial Cable, Messenger with Hook

These clamps are used for tangent construction or angles to 10°.





Features

- Hook serves as a safety device and can be used in stringing the cable
- Accommodates 5/8" pole mounting bolt

Material

Ductile iron hot dip galvanized

Catalog Number	Clamp Gripping Length (in)	Messenger Range	Weight /100 (lbs)
PA292X	1 3/4	0.109 - 0.134" bare or insulated	57
PA296X	3 1/4	250 insulated	147

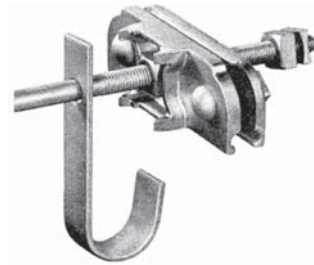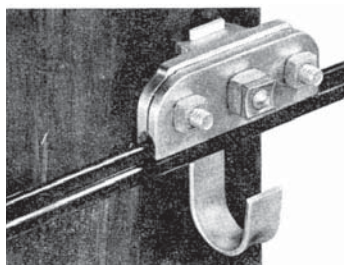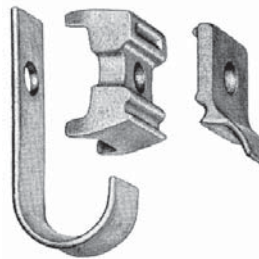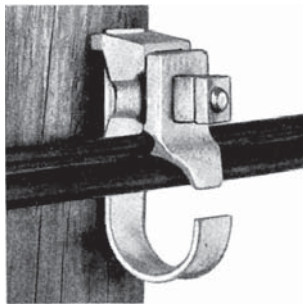

Aerial Cable, Messenger with Hook

Features

- For tangent or angles to 10°
- Accommodates 1/4" insulated messenger
- Independent clamping-remains tight if pole shrinkage occurs

Material

Ductile iron dip galvanized

Catalog Number	Clamp Gripping Length (in)	Weight /100 (lbs)
J2235	1 7/8	172
J2245	3 1/4	370