





Clamps




Ground/Bond

Material

Clamp: Ductile iron dip galvanized
 Hardware: High strength steel, hot dip galvanized

Catalog Number	A	B	C	J	Cable Range		Weight /100 (lbs)
					Main	Tap	
BC-63	1 5/8	1 1/4	1 3/4	3/8	0.25 - 0.56"	0.16 - 0.30"	51
BC-105	2 1/2	1 1/2	3	1/2	0.50 - 1.00"	0.16 - 0.46"	107

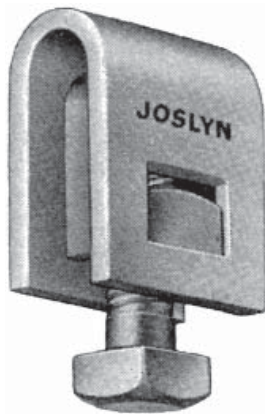

Ground/Bond

This grounding clamp is used to bond the cable sheath to the messenger strand

Features

- Clamp body is made with an inside keeper riding on the end of the bolt
- 1/2" bolt can be removed to place the clamp over the messenger wire
- The clamp body is made of 1 1/2" x 3/16" steel

Material


Steel hot dip galvanized

Catalog Number	Weight /100 (lbs)
J7956	52


Ground/Guy Clip

Material



Keepers: Ductile iron hot dip galvanized
 U-bolts: Steel hot dip galvanized



GC-67



GC-64C
GC-67C



Catalog Number	Wire Range (in)	U-Bolt Dia. (in)	Weight /100 (lbs)
GC-64C	0.18 - 0.38	3/8	64
GC-67	0.25 - 0.50	1/2	106
GC-67C	0.25 - 0.50	1/2	130