



J1493Y

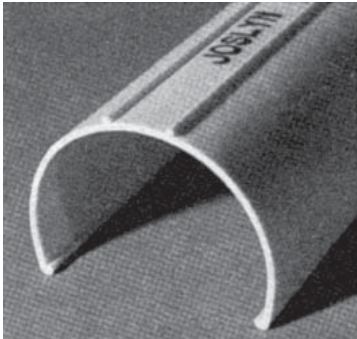

J1491Y and J1498Y

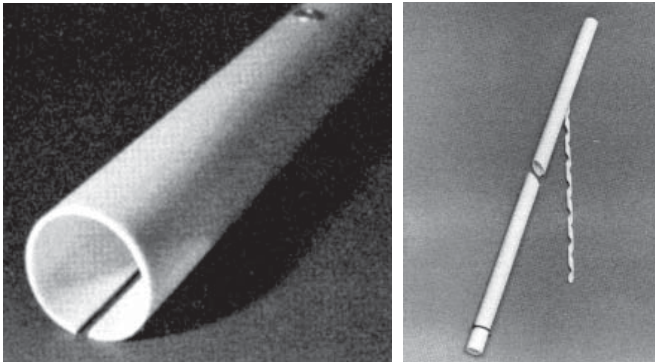

J5518 and J5718

## Guy, Plastic

Provide a strong, highly visible, economical safeguard from exposed guy wires and anchor rods.

### Features

- Ultraviolet stabilized for long life and resistant to fading

#### J1493Y Features

- 2" diameter full round design permits complete coverage of guy wire and anchor rod for maximum protection and improved visibility
- 3" long partial cutaway to facilitate installation of the galvanized bolted clamp assembly at one end
- The other end is secured by hand insertion of the one way, spiked plastic rivet

#### J1491Y & J1498Y Features

- 2 1/2" diameter, two-thirds round design provides excellent visibility and permits installation over anchor rods up to 1 1/4" diameter
- Four sets of holes are located along the guard to permit flexibility of mounting positions
- Bolted clamp assemblies or wire ties used for attachment methods

#### J5518 & J5718 Features

- Full round helical pigtail guards provide installation without the need for tools
- Utilize a 23" long helically formed polyethylene tie pigtail, which is wrapped around the guy strand to provide tool free installation to guy strands 3/16" to 1/2"
- Secured by a marine grade aluminum rivet positioned five feet above bottom of guard
- Bottom of guard includes one way locking nylon strap for additional installation security and resistance to unauthorized removal

### Material

High-density, impact-resistant polyethylene or PVC

Catalog Number	Description	Attachment	Weight /100 (lbs)
J1493Y	8ft. yellow, Polyethylene	bolted clamp	240
J1491Y	8ft. yellow, PVC	3 bolted clamps	270
J1498Y	8ft. yellow, PVC	3 wire ties	190
J5518	8ft. yellow, PVC	helical tie	130
J5718	8ft. yellow, Polyethylene	helical tie	130