

MPS Catalog Number:

S1 40 80 114 VB SS 030

Date:

09/05/2013

END FITTINGS

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-5)

MATERIAL

Corona Ring (Tower):

None

Corona Ring (Line):

12" Corona Ring

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

30 standard

Rod Diameter:

16 mm

Weight Estimate:

21.3 lbs

9.7 kg

DIMENSIONAL VALUES

Section Length (L):

125.2 in

3,180 mm

Rubber Length (X):

114 in

2,884 mm

Standard Shed Height (P):

2.1 in

54 mm

Shed Spacing (S):

4.1 in

104 mm

Dry Arc Distance:

113.7 in

2,888 mm

Leakage Distance:

228.7 in

5,809 mm

ELECTRICAL VALUES

60 Hz Dry Flashover:

1,067 kV

Min. Withstand:

966 kV

60 Hz Wet Flashover:

920 kV

Min. Withstand:

768 kV

Pos. Critical Impulse Flashover:

1,784 kV

Min. Withstand:

1,603 kV

Neg. Critical Impulse Flashover:

1,850 kV

Min. Withstand:

1,667 kV

MECHANICAL VALUES

Specified Mech. Load (SML):


25,000 lbs

111.2 kN

Routine Test Load (RTL):

12,500 lbs

55.6 kN

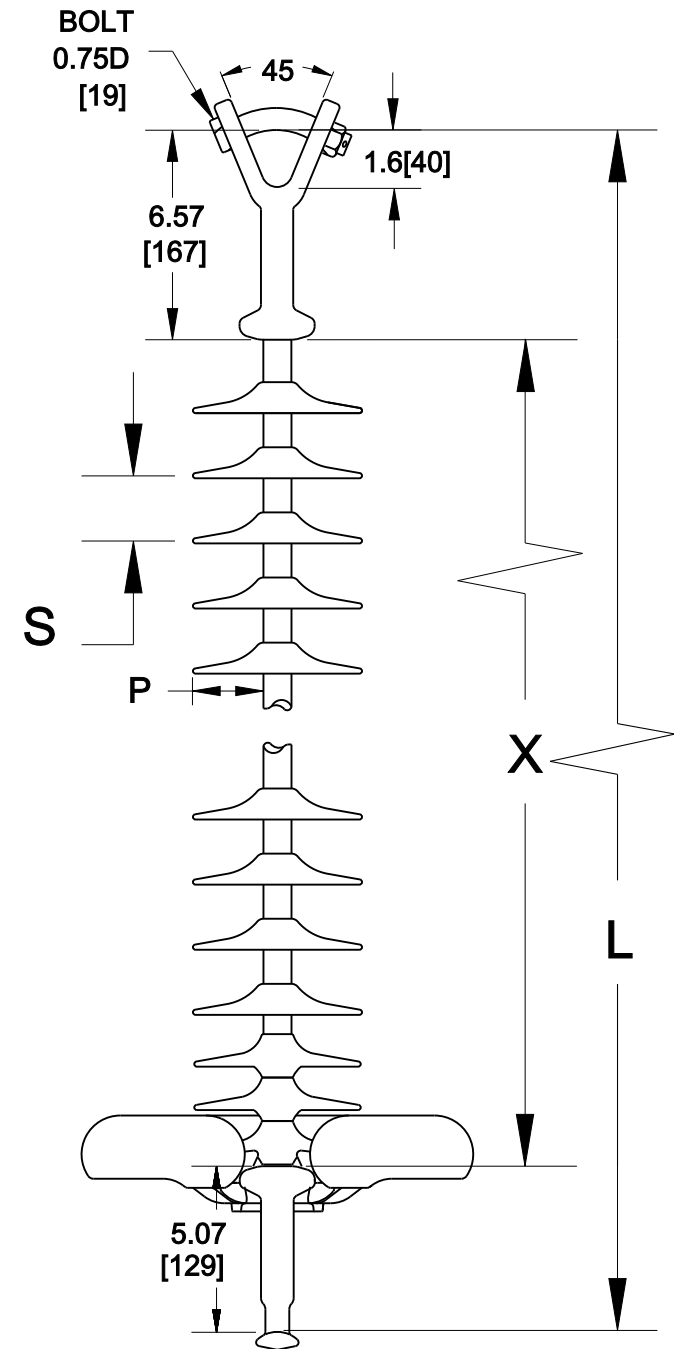

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]

Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds
Complies with applicable ANSI and IEC standards.