

MPS Catalog Number:

S1 70 80 054 MA AL 035

Date:

01/23/2014

END FITTINGS

Tower End Fitting:

Socket (Forged Steel) (ANSI 52-5)

Line End Fitting:

Ball (Forged Steel) (ANSI 52-5)

MATERIAL

Corona Ring (Tower):

None

Corona Ring (Line):

8" Corona Ring

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

17 large 18 standard

Rod Diameter:

16 mm

Weight Estimate:

13.7 lbs 6.2 kg

DIMENSIONAL VALUES

Section Length (L):

65 in 1,651 mm

Rubber Length (X):

54.4 in 1,382 mm

Standard Shed Height (P1):

1.5 in 38 mm

Large Shed Height (P2):

2 in 51 mm

Projection Ratio (S/P):

- 1.5

Shed Spacing (S):

3 in 76 mm

Dry Arc Distance:

54.1 in 1,374 mm

Leakage Distance:

158.4 in 4,023 mm

ELECTRICAL VALUES

60 Hz Dry Flashover:

529 kV Min. Withstand: 488 kV

60 Hz Wet Flashover:

470 kV Min. Withstand: 409 kV

Pos. Critical Impulse Flashover:

902 kV Min. Withstand: 787 kV

Neg. Critical Impulse Flashover:

953 kV Min. Withstand: 838 kV


MECHANICAL VALUES

Specified Mech. Load (SML):

25,000 lbs 111.2 kN

Routine Test Load (RTL):

12,500 lbs 55.6 kN

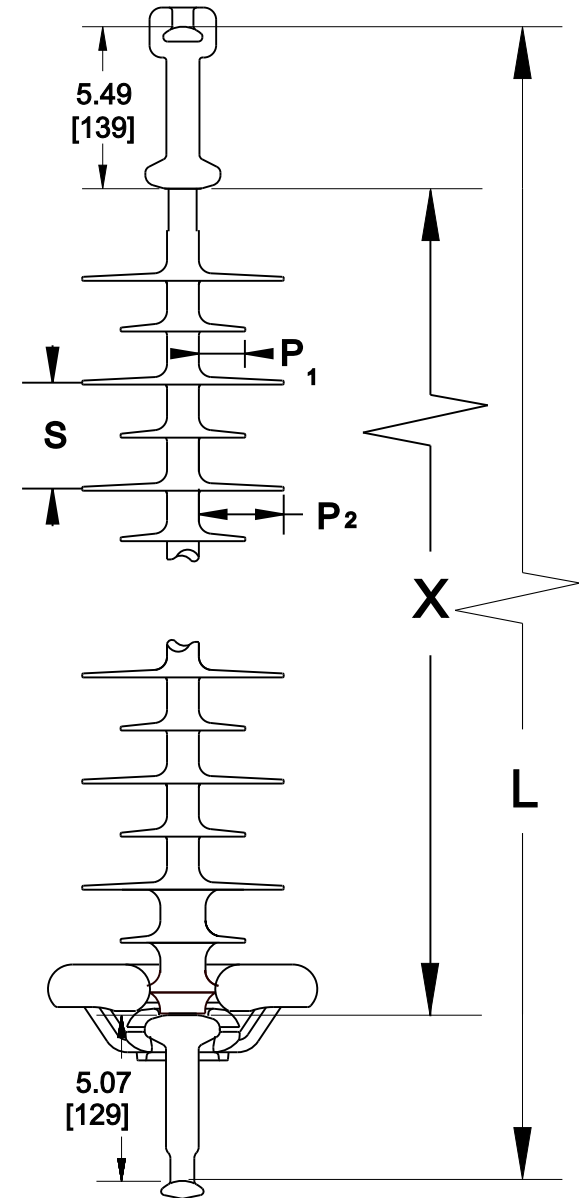

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]

Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds
Complies with applicable ANSI and IEC standards.