

MPS Catalog Number:
Date:

S1 70 80 072 MA AL 047
01/23/2014

END FITTINGS

Tower End Fitting: Socket (Forged Steel) (ANSI 52-5)
Line End Fitting: Ball (Forged Steel) (ANSI 52-5)

MATERIAL

Corona Ring (Tower): None
Corona Ring (Line): 8" Corona Ring
Corona Rings are recommended for applications of 230 kV and above
Number of Sheds: 23 large 24 standard
Rod Diameter: 16 mm
Weight Estimate: 16.2 lbs 7.3 kg

DIMENSIONAL VALUES


Section Length (L): 83 in 2,108 mm
Rubber Length (X): 72.4 in 1,839 mm
Standard Shed Height (P1): 1.5 in 38 mm
Large Shed Height (P2): 2 in 51 mm
Projection Ratio (S/P): - 1.5
Shed Spacing (S): 3 in 76 mm
Dry Arc Distance: 72.1 in 1,831 mm
Leakage Distance: 213.3 in 5,418 mm

ELECTRICAL VALUES

60 Hz Dry Flashover: 701 kV Min. Withstand: 637 kV
60 Hz Wet Flashover: 608 kV Min. Withstand: 529 kV
Pos. Critical Impulse Flashover: 1,175 kV Min. Withstand: 1,040 kV
Neg. Critical Impulse Flashover: 1,232 kV Min. Withstand: 1,097 kV

MECHANICAL VALUES

Specified Mech. Load (SML): 25,000 lbs 111.2 kN
Routine Test Load (RTL): 12,500 lbs 55.6 kN

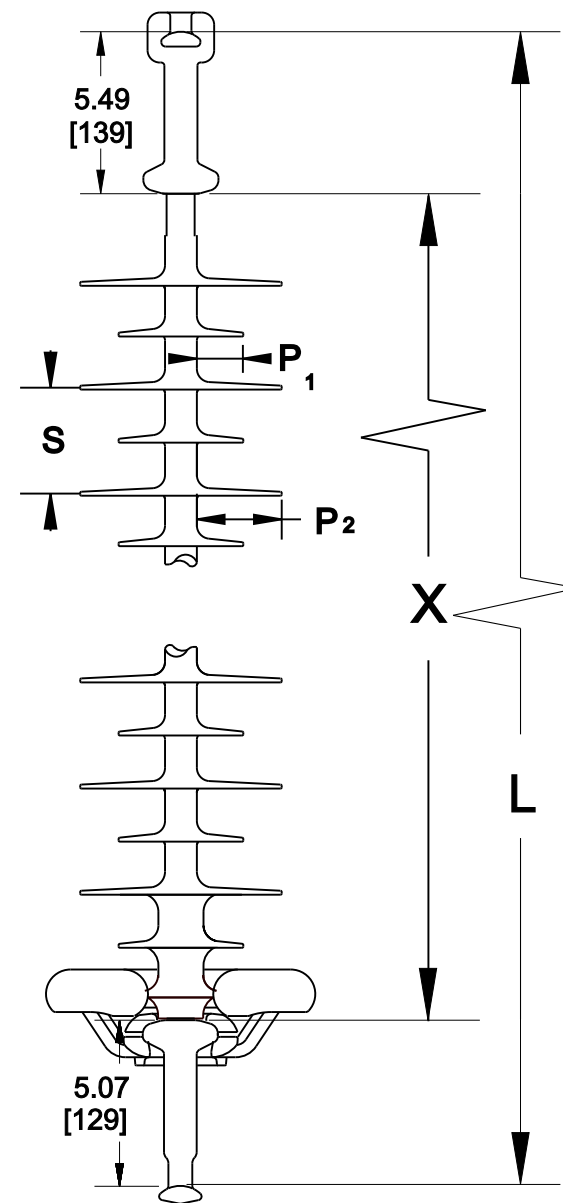

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]
Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds
Complies with applicable ANSI and IEC standards.