

MPS Catalog Number:

S1 90 90 066 MA AL 043

Date:

01/23/2014

**END FITTINGS**

Tower End Fitting:

Eye (Forged Steel)

Line End Fitting:

Eye (Forged Steel)

**MATERIAL**

Corona Ring (Tower):

None

Corona Ring (Line):

8" Corona Ring

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

21 large 22 standard

Rod Diameter:

16 mm

Weight Estimate:

15.6 lbs 7.1 kg

**DIMENSIONAL VALUES**

Section Length (L):

79.8 in 2,027 mm

Rubber Length (X):

66.4 in 1,687 mm

Standard Shed Height (P1):

1.5 in 38 mm

Large Shed Height (P2):

2 in 51 mm

Projection Ratio (S/P):

- 1.5

Shed Spacing (S):

3 in 76 mm

Dry Arc Distance:

66.1 in 1,679 mm

Leakage Distance:

195 in 4,953 mm

**ELECTRICAL VALUES**

60 Hz Dry Flashover:

644 kV Min. Withstand: 588 kV

60 Hz Wet Flashover:

563 kV Min. Withstand: 490 kV

Pos. Critical Impulse Flashover:

1,084 kV Min. Withstand: 956 kV

Neg. Critical Impulse Flashover:

1,140 kV Min. Withstand: 1,010 kV

**MECHANICAL VALUES**

Specified Mech. Load (SML):

25,000 lbs 111.2 kN


Routine Test Load (RTL):

12,500 lbs 55.6 kN

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]

Note: Drawing not actual depiction of insulator appearance

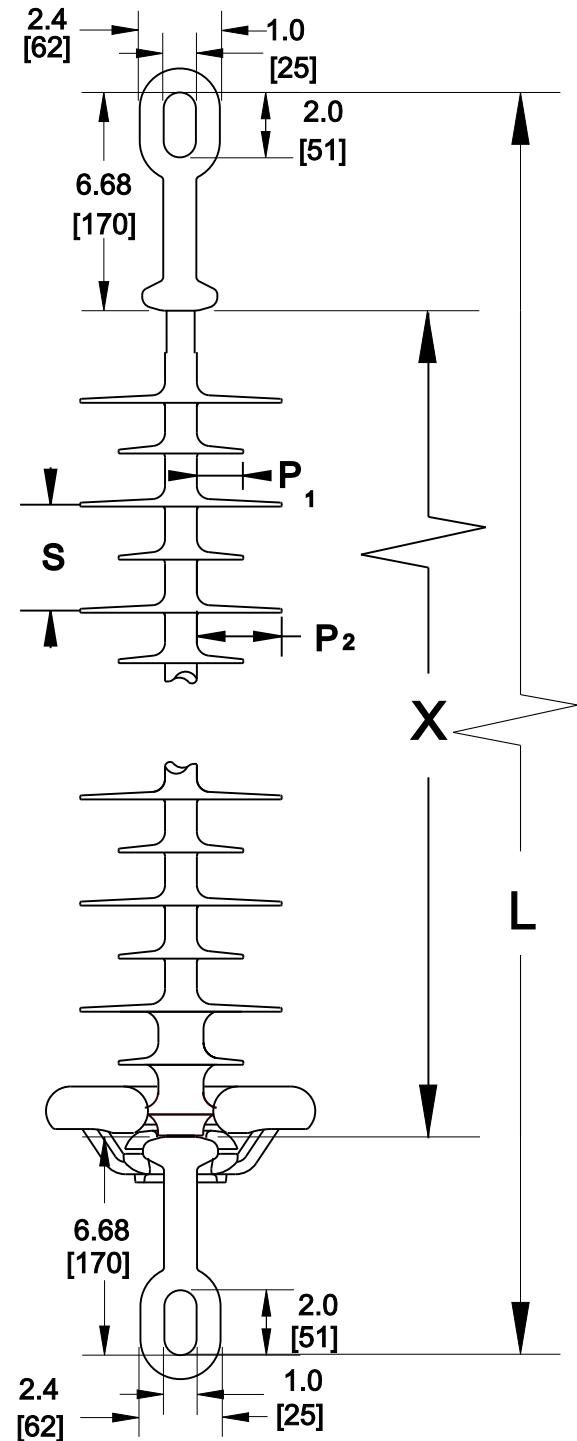

Silicone Rubber Sheath & Sheds  
Complies with applicable ANSI and IEC standards.