

MPS Catalog Number:

S1 90 90 078 MA AL 051

Date:

01/23/2014

**END FITTINGS**

Tower End Fitting:

Eye (Forged Steel)

Line End Fitting:

Eye (Forged Steel)

**MATERIAL**

Corona Ring (Tower):

None

Corona Ring (Line):

8" Corona Ring

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

25 large 26 standard

Rod Diameter:

16 mm

Weight Estimate:

17.3 lbs 7.8 kg

**DIMENSIONAL VALUES**

Section Length (L):

91.7 in 2,329 mm

Rubber Length (X):

78.3 in 1,989 mm

Standard Shed Height (P1):

1.5 in 38 mm

Large Shed Height (P2):

2 in 51 mm

Projection Ratio (S/P):

- 1.5

Shed Spacing (S):

3 in 76 mm

Dry Arc Distance:

78.1 in 1,984 mm

Leakage Distance:

231.6 in 5,883 mm

**ELECTRICAL VALUES**

60 Hz Dry Flashover:

758 kV Min. Withstand: 686 kV

60 Hz Wet Flashover:

651 kV Min. Withstand: 567 kV

Pos. Critical Impulse Flashover:

1,264 kV Min. Withstand: 1,125 kV

Neg. Critical Impulse Flashover:

1,323 kV Min. Withstand: 1,183 kV

**MECHANICAL VALUES**

Specified Mech. Load (SML):

25,000 lbs 111.2 kN


Routine Test Load (RTL):

12,500 lbs 55.6 kN

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]

Note: Drawing not actual depiction of insulator appearance

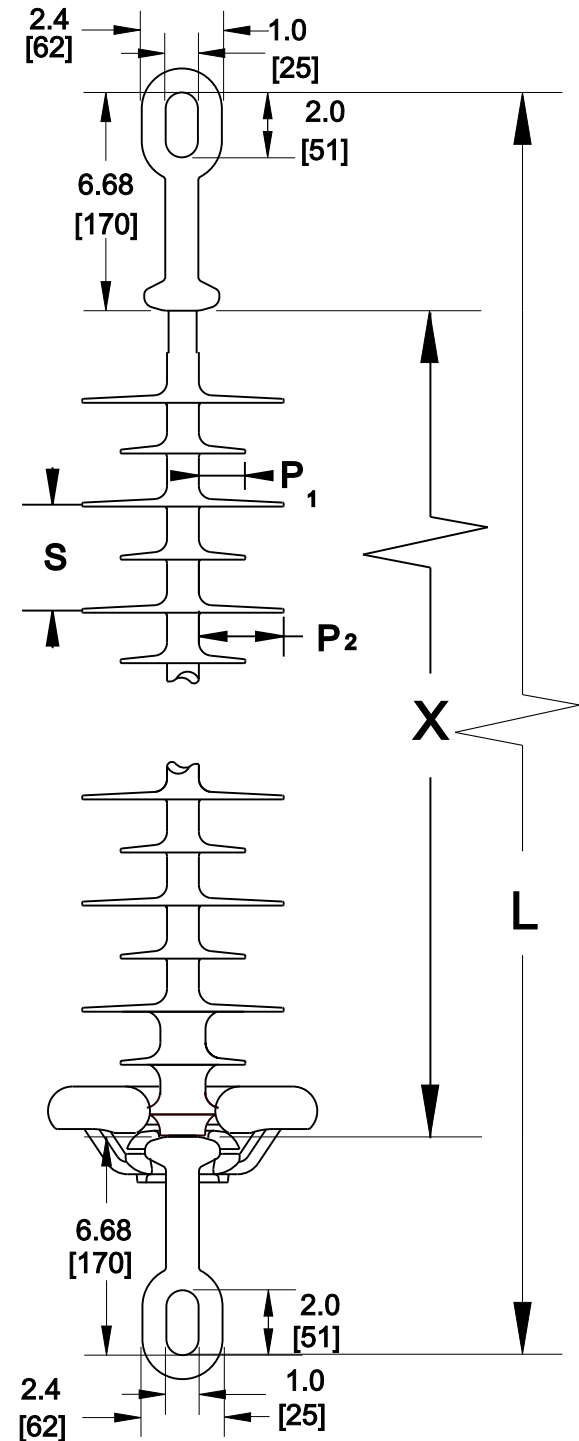

Silicone Rubber Sheath & Sheds  
Complies with applicable ANSI and IEC standards.