# Bands, Pole





### **Strap Style Pole Bands**

MPS strap style pole bands have been designed to accommodate a wide range of distribution pole diameters. Each unit incorporates four (4) 3/4" diameter studs and each band section has 9/16" square holes for lag screws.

#### **Features**

- Ultimate Tensile Strength: 20,000 lbs
- Band Section: 1/4" x 4" (except J6643 = 5/16" x 3")
  Connecting Link Mounting Position: All Four Sides


#### Material

Links: Steel hot dip galvanized Hardware: Steel hot dip galvanized

Catalog Number	Pole Diameter Range (in)	Weight (lbs)	
J6641	9 1/2 - 13 1/2	16.0	
J6643	7 - 9 1/2	13.2	
J6644	8 - 11	15.0	
J6684	12 - 16	18.6	









## **Connecting Link**

Catalog Number	Size (in)	Length	Hole Size (in)	Ultimate Strength (lbs)	Weight /100 (lbs)
J6650	1/4 x 2 x 9 1/2	7 1/2	13/16	20000	261

<sup>\*</sup> Each J6650 consists of one pair (two halves)






#### **Guy Roller**

Catalog Number	Hole Size (in)	Wireseat Radius (in)	D	н	т	Weight /100 (lbs)
J6288	13/16	0.41	2 3/8	2 1/16	13/16	64

## Band, Pole





#### **Universal Style Bands**

MPS universal wrap-around type pole bands are ideal for deadending, guying and spare arm suspension assemblies.


#### Feature

- Installs in minutes
- Assembled with one 3/4" curved bolt and one J6277 cone head bolt

#### Material

Steel hot dip galvanized

Catalog Number	Pole Diameter Range (in)	Steel Size	Weight (lbs)
J6270	8 - 14	4 x 3/16	14.0
J6280	6 - 10	4 x 3/16	11.0



#### **Universal Band Accessories**


Cone head bolts are used to attach fittings to universal bands. Installed from the inside of the band, the square shoulder fits into the rectangular band slots and the special head digs into the pole to counteract band slippage.

The J6157 clevis is designed to surround the 4" wide section of a universal pole band, developing great strength for deadending. The deadend clevis is furnished complete with a 3/4" bolt, square nut, concave locknut and a selflocking cotter pin.

#### Material

Steel hot dip galvanized

Catalog Number	Description	Steel Size (in)	Weight /100 (lbs)
J6157	Deadend Clevis	2 1/2 x 3/16	272
J6277	Cone Head Bolt	3/4 x 2 1/2	50

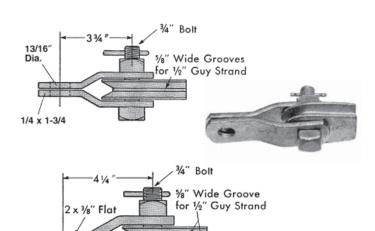

#### **Guy Attachment Assembly**

Catalog Number	Туре	Weight /100 (lbs)
J6273	Single	320
J6274	Double	607

13/16